

Instructions for Use

Prevista Dry WC element height-adjustable after installation by the installer



for WC flush plates for Prevista

Model
8522.31

Year built (from)
01/2019

viega

Table of contents

1	About these instructions for use	3
	1.1 Target groups	3
	1.2 Labelling of notes	3
	1.3 About this translated version	4
2	Product information	5
	2.1 Standards and regulations	5
	2.2 Intended use	5
	2.2.1 Areas of application	5
	2.3 Product description	5
	2.3.1 Overview	5
	2.3.2 Compatible components	6
	2.3.3 Technical data	7
	2.4 Accessories	8
3	Handling	10
	3.1 Assembly information	10
	3.1.1 Mounting conditions	10
	3.1.2 Installation dimensions	11
	3.2 Assembly	11
	3.2.1 Mounting WC element	11
	3.2.2 Connecting concealed cistern	18
	3.2.3 Mounting the drain elbow	21
	3.2.4 Set and clad the WC element	21
	3.2.5 Setting the flush volume	22
	3.2.6 Mounting WC ceramic	25
	3.3 Use	27
	3.4 Cleaning and maintenance	28
	3.5 Disposal	28

1 About these instructions for use

Trade mark rights exist for this document; for further information, go to viega.com/legal.

1.1 Target groups

The information in this instruction manual is directed at the following groups of people:

- Heating and plumbing experts and trained personnel
- Consumers
- Drywall builders

Individuals without the abovementioned training or qualification are not permitted to mount, install and, if required, maintain this product. This restriction does not extend to possible operating instructions.

The installation of Viega products must take place in accordance with the general rules of engineering and the Viega instructions for use.

1.2 Labelling of notes

Warning and advisory texts are set aside from the remainder of the text and are labelled with the relevant pictographs.



DANGER!

This symbol warns of possible life-threatening injury.



WARNING!

This symbol warns of possible serious injury.



CAUTION!

This symbol warns of possible injury.



NOTICE!

This symbol warns of possible damage to property.



This symbol gives additional information and hints.

1.3 About this translated version

This instruction for use contains important information about the choice of product or system, assembly and commissioning as well as intended use and, if required, maintenance measures. The information about the products, their properties and application technology are based on the current standards in Europe (e.g. EN) and/or in Germany (e.g. DIN/DVGW).

Some passages in the text may refer to technical codes in Europe/Germany. These should serve as recommendations in the absence of corresponding national regulations. The relevant national laws, standards, regulations, directives and other technical provisions take priority over the German/European directives specified in this manual: The information herein is not binding for other countries and regions; as said above, they should be understood as a recommendation.

2 Product information

2.1 Standards and regulations

The following standards and regulations apply to Germany / Europe and are provided as a support feature.

Regulations from section: Fields of application / Mounting conditions

Scope / Notice	Regulations applicable in Germany
Suitable masonry walls	EN 1996-1-1
Suitable concrete walls	DIN 1045
Suitable stud frames	DIN 18183

2.2 Intended use

2.2.1 Areas of application

The Prevista Dry WC element is suitable for mounting on masonry wall constructions and stud frames pursuant to the regulations in section [↪ Chapter 2.1 'Standards and regulations' on page 5](#) and can be used in a Prevista Dry Plus pre-wall construction.

The individual seat height can be subsequently adjusted within a range of 80 mm.

2.3 Product description

2.3.1 Overview

The WC element is equipped as follows:

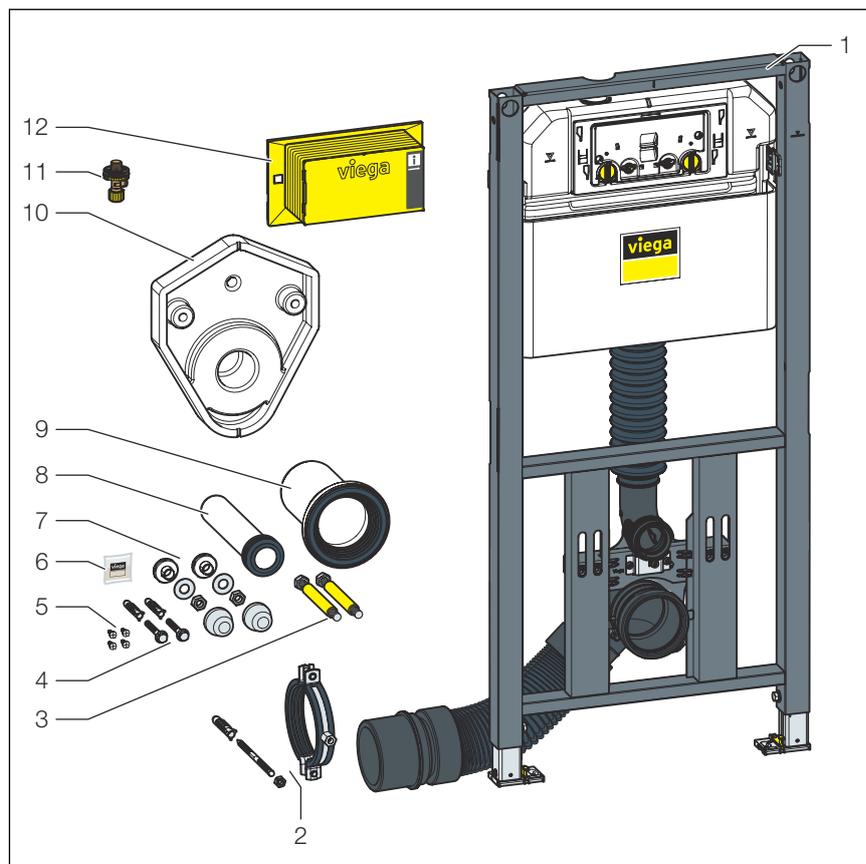


Fig. 1: Components

- 1 3H concealed cistern
- 2 pipe clamp
- 3 Threaded rods for wall-mounted WC (gauges for bore hole 180 or 230 mm)
- 4 Screws and dowels for fixing in the floor
- 5 Screws for fixing in stud frame
- 6 Silicon grease
- 7 Mounting set for WC ceramic
- 8 Flushing pipe
- 9 WC connection socket with lip seal
- 10 Hard foam block
- 11 Corner valve
- 12 Inspection shaft cover

2.3.2 Compatible components

The WC element is compatible with all common WC ceramics, even with larger projection (barrier-free).

The WC element can be extended by the following compatible components:

- Prevista Dry fixing element
- Prevista Dry fixing set model 8570.36
- Prevista Dry fixing set model 8573
- Prevista Dry Plus fixing set model 8570.49

- WC cover plate for model 8040.21
- Accessory set electronic model 8655.11

► Mount the components in accordance with the respective instructions for use.

2.3.3 Technical data

Flush volume

Small flush volume	Factory setting	Approx. 3 l
	Setting range	Approx. 2–4 l
Large flush volume	Factory setting	Approx. 6 l
	Setting range	Approx. 3.5–7.5 l


Water pressure

Water pressure min.	15 kPa (0.15 bar)
Water pressure max.	1000 kPa (10 bar)


2.4 Accessories

For mounting, Viega recommends to use the Prevista Dry fixing set.


Prevista Dry fixing set model 8570.36 for fixing the Prevista Dry elements in single / line mounting, single mounting directly onto the installation body or corner mounting on masonry or steel stud frame.

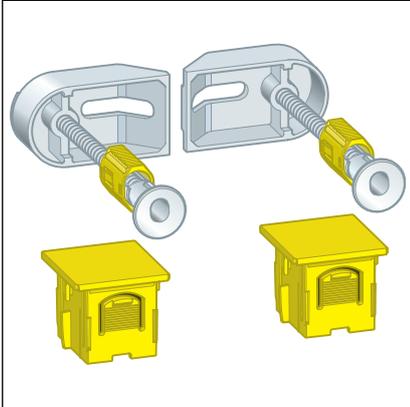


Prevista Dry fixing set model 8573 for single mounting of Prevista Dry elements to the solid wall.

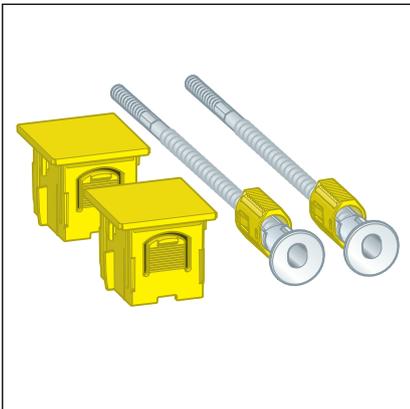

Prevista Dry Plus fixing set model 8570.49 for single mounting of the Prevista Dry elements in Prevista Dry Plus.

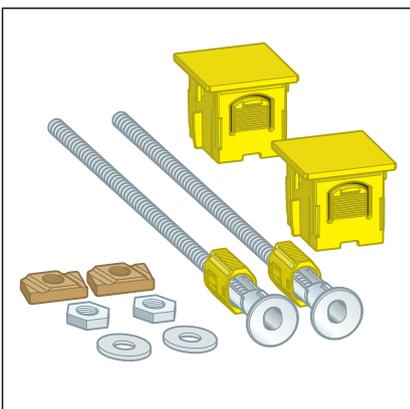

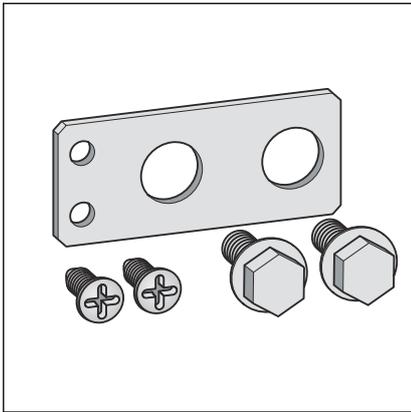

When mounting a fastening element (model 8570.32), use the connection set (model 8570.65).

3 Handling

3.1 Assembly information

3.1.1 Mounting conditions

Suitable walls

- Masonry walls
- Concrete walls
- Metal stud frames
- Prevista Dry Plus pre-wall constructions

The wall constructions must comply with the regulations in section [↪ Chapter 2.1 'Standards and regulations' on page 5.](#)

The WC element may only be mounted on even wall surfaces.

Construction height

With the construction height, the marked height of the upper edge of the finished floor must be observed.

Water connection

The WC element has an R ½ inch water connection.



NOTICE!

Always use the newly delivered hose set for the water connection. Do not use old hose sets.

Actuation versions

The WC element can be extended by a remote flush actuation or by an electronic actuation, as well as by sensitive flush plates. The cables for these electrical actuation versions must be laid before cladding.

The corresponding conduit pipe is required when preparing the remote flush actuation.

3.1.2 Installation dimensions

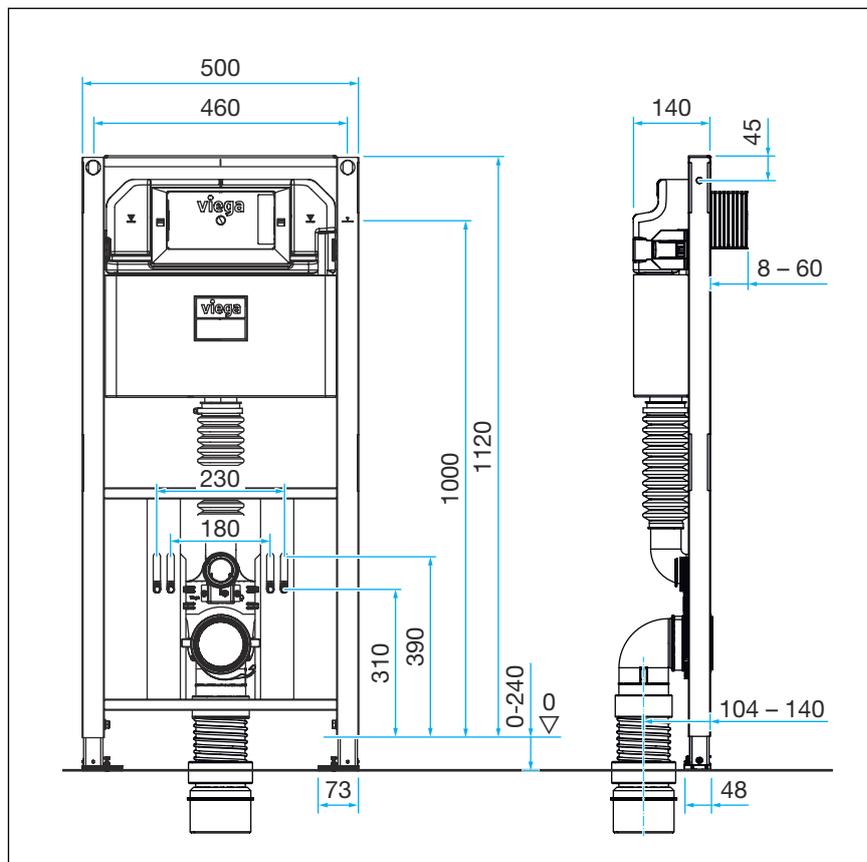


Fig. 2: Dimensional drawing

3.2 Assembly

3.2.1 Mounting WC element

Mounting to a masonry wall




Masonry and concrete walls

When mounting multiple WC elements with an interval of > 500 mm, Viega recommends using a Prevista Dry support bracket (model 8570.48). Observe the instructions for use of the support bracket when mounting.




For mounting, Viega recommends to use a Prevista Dry fixing set.

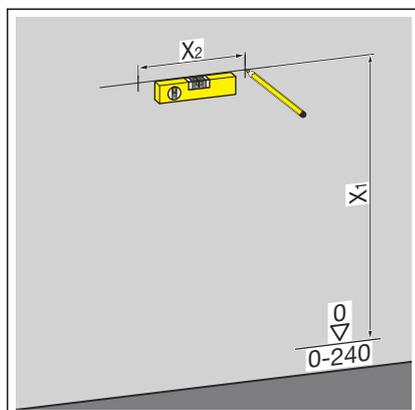

► Determine and mark the fixing points.

- X1: 1100 mm
- X2: Depending on the fixing set used

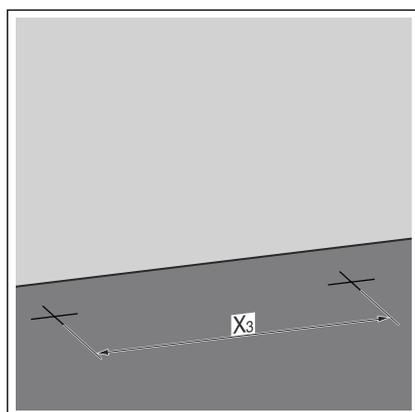


► Determine and mark the fixing points on the floor.

- X3: 375 mm


► Drill the holes.

► Insert the dowels.

INFO! Mount the Prevista Dry fixing set pursuant to the instructions for use for the fixing set.

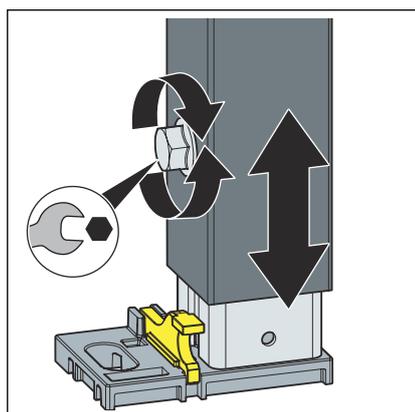


► Loosen the feet of the element using a fork spanner.

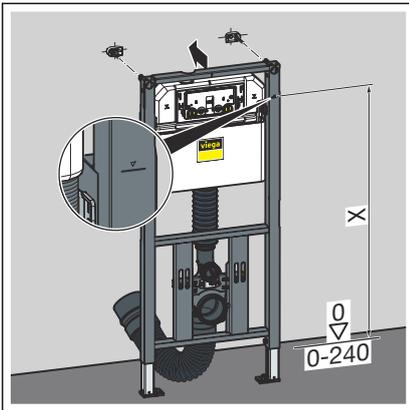

► Adjust the construction height of the element in accordance with the on-site marking of the upper edge of the finished floor.

■ X: 1000 mm

► Tighten the feet of the element using a fork spanner.

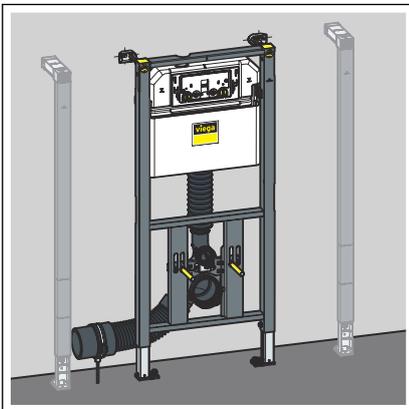


◇ The element is attached to the wall.


Mounting in Prevista Dry Plus




Mount the Prevista Dry Plus pre-wall construction pursuant to the instructions for use of the Prevista Dry Plus system.

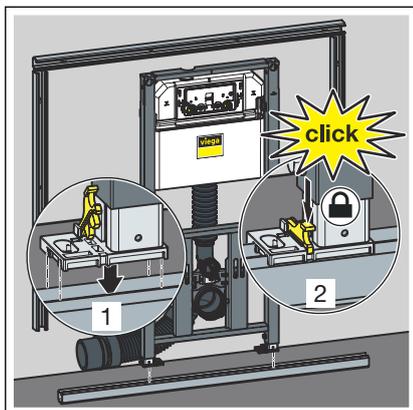


- Position the element on the floor rail.
- Fix the feet on the floor rail using the clips.

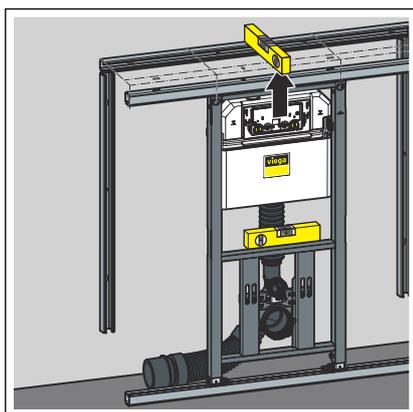

- Set the height of the element by means of the feet.

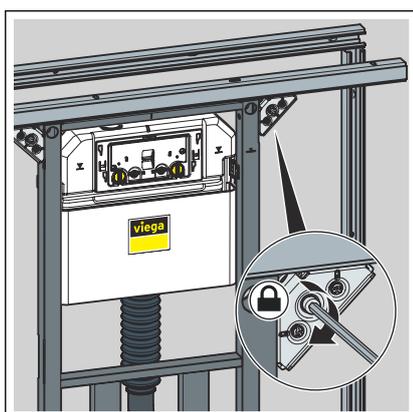


- Fix the element with the Prevista Dry Plus rail connectors.

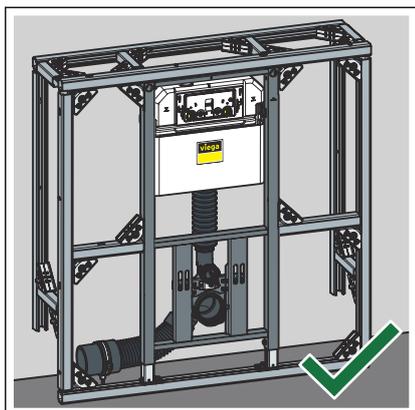


- The element is fixed in the Prevista Dry Plus pre-wall construction.


Mounting in steel stud frame

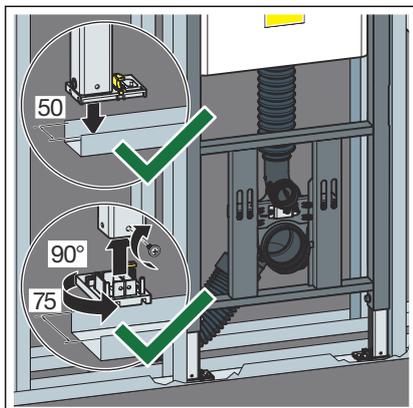


- Position the element on the floor rail.
- If necessary, adjust the foot depth from 50 mm (pre-mounted) to 75 mm.
- Pull the foot out and turn by 90°.
- Fix the feet.

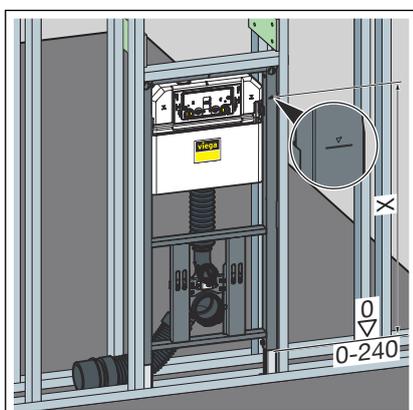

- Adjust the construction height of the element in accordance with the on-site marking of the upper edge of the finished floor.
 - X: 1000 mm

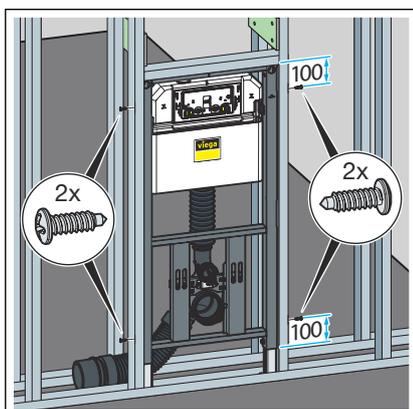


- Attach the element to the stud frame using the screws supplied.

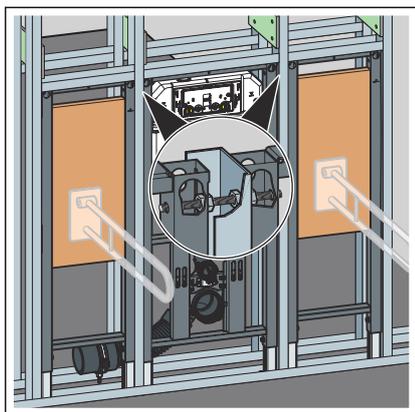


- If applicable, connect further elements to the element via the stud frame.

Mounting the site protection of the flush actuation

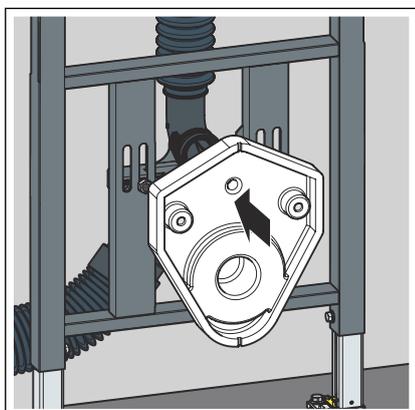


- Install the site protection of the flush actuation.
- Push the hard foam block over the threaded rods onto the drain-pipe.


3.2.2 Connecting concealed cistern

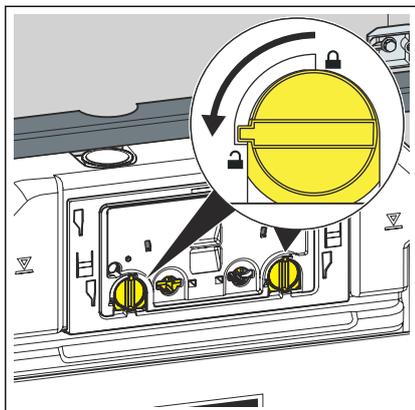


► Turn the site protection panel lock 90° anti-clockwise.

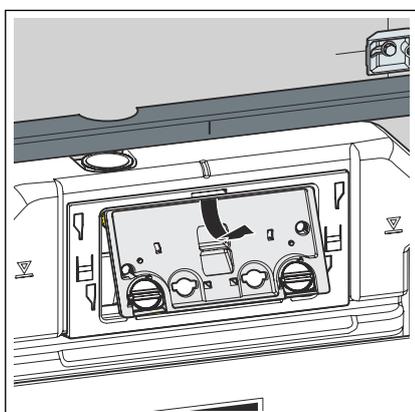

► Remove the site protection panel.

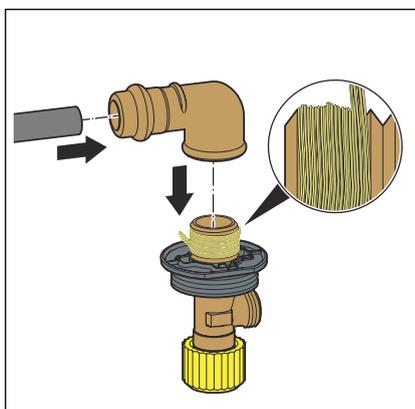


- Place the press connector onto the water inlet.
- Press the connection.
- Seal the threaded connectors of the corner valve.
- Screw the corner valve into the thread side of the press connector.

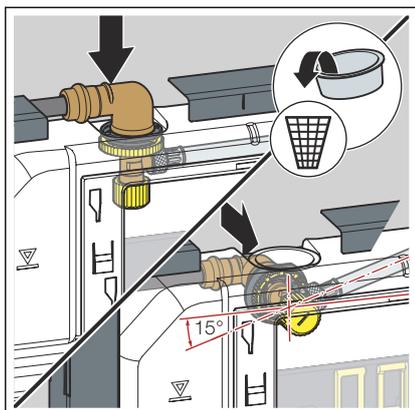


INFO! For the concealed cistern 3H, the corner valve can be attached from the top or rear.


- Remove the plug.
- Insert the corner valve into the cistern.

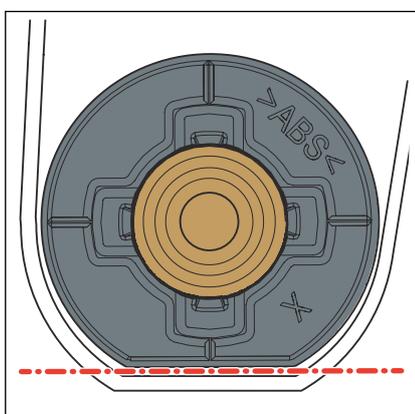

INFO! Observe the proper fit of the corner valve.

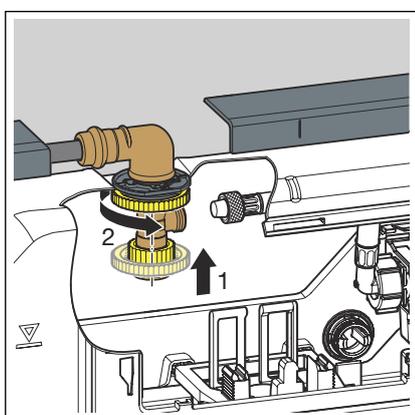


- Use the lock nut to screw the corner valve and the cistern to each other.

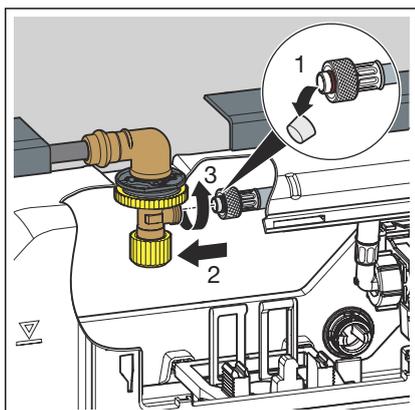


- Remove the protective cap from the flexible hose.
- Screw the flexible hose and the corner valve to each other (hand tight).

INFO! If a WC flush plate with electronic flush actuation is to be mounted, the small flush volume must be set to 2 litres.


- Set the flush volume as applicable, ↗ **Chapter 3.2.5 'Setting the flush volume' on page 22.**

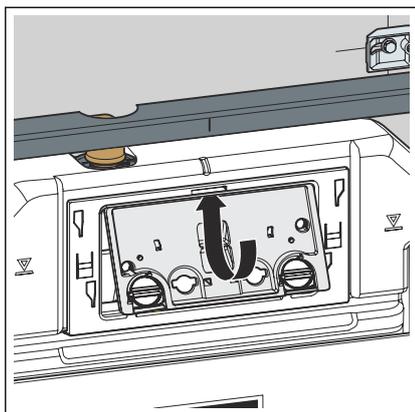


➤ Insert the site protection panel into the cistern.

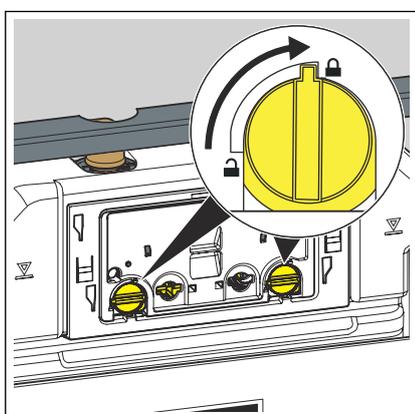

➤ Turn the site protection panel's lock by 90° clockwise.

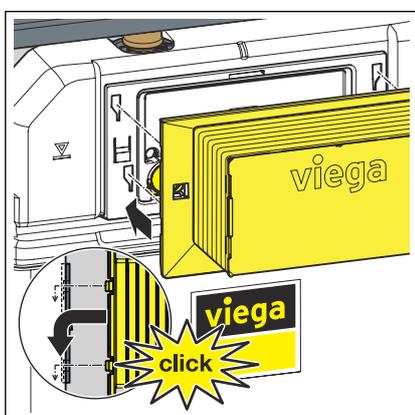

➤ Place the inspection shaft on the site protection panel.


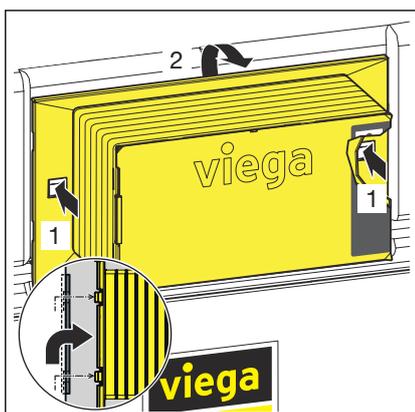


To remove the inspection shaft, press in the fixing clips at the side.

3.2.3 Mounting the drain elbow


Avoid the following when mounting:

- sagging
- tensile strain
- Alternatively: Secure the drain elbow onto the wall or floor without the fixing material supplied, taking into account the fixing sizes.

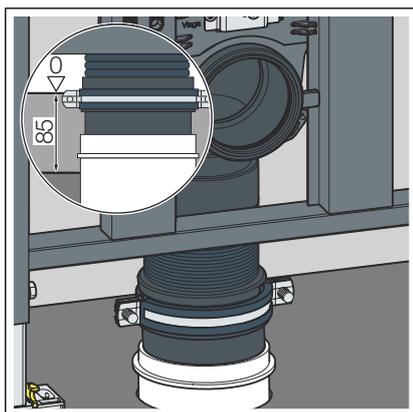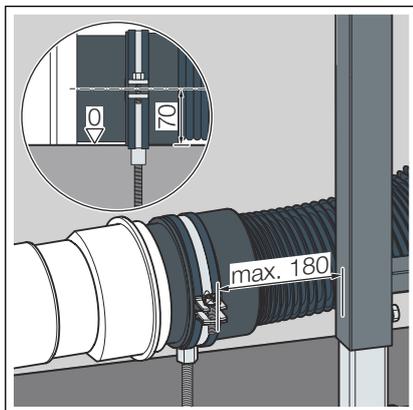


INFO! Installing pipelines vertically through the bare concrete floor is only possible with the drain elbow (model 8095, Art. No. 713744). The screed height must be at least 85 mm.


3.2.4 Set and clad the WC element

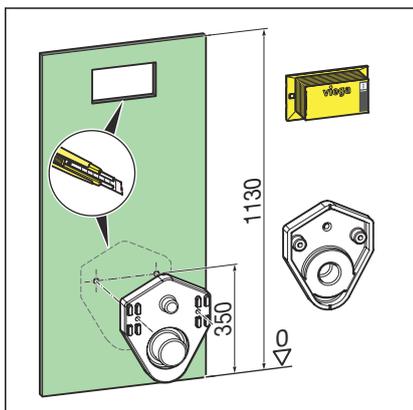

- Mark the contour of the hard foam block onto the gypsum cladding panel.
- Remove the hard foam block and cut out the contour (finished floor to middle of threaded rods 350 mm).

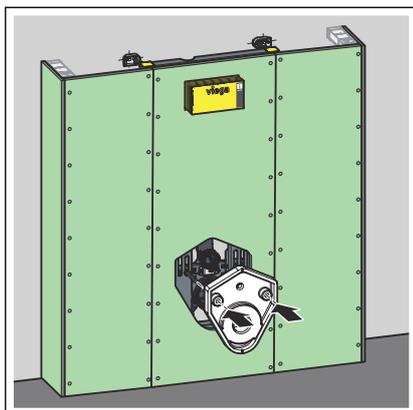

- Clad the element with suitable gypsum cardboard cladding panels.
- Re-position the hard foam block.

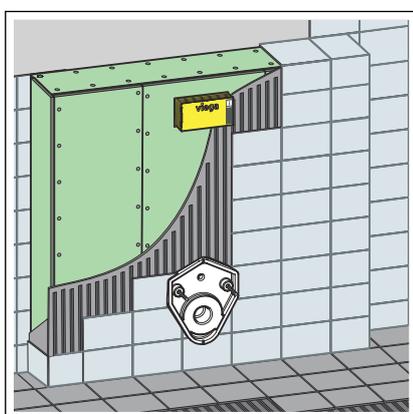

- Tile the WC element.


3.2.5 Setting the flush volume




For an electronic flush actuation, the small flush volume must be set to 2 litres.

Requirements:


- The cistern is freely accessible.
- The water supply has been shut off.
- The ceramic has been mounted.
- Fold the tabs forward.

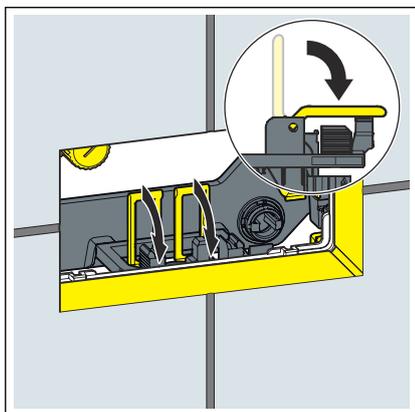


- Lift the drain valve.

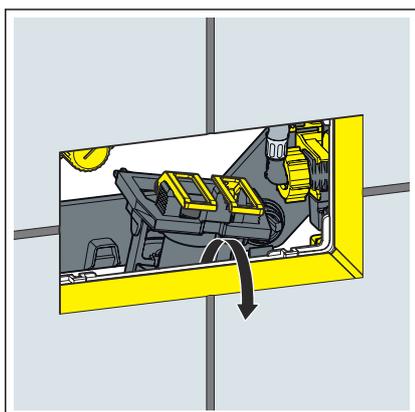


- Remove the drain valve through the revision opening.

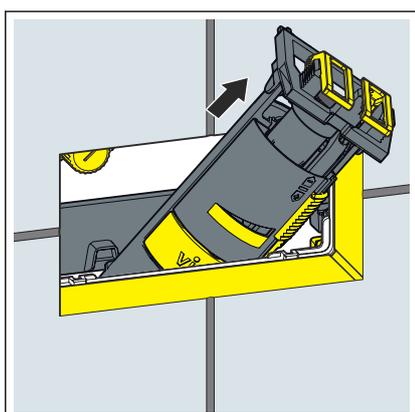

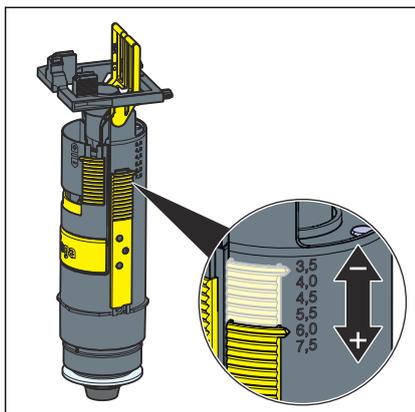

➤ Set the large flush volume at the drain valve.

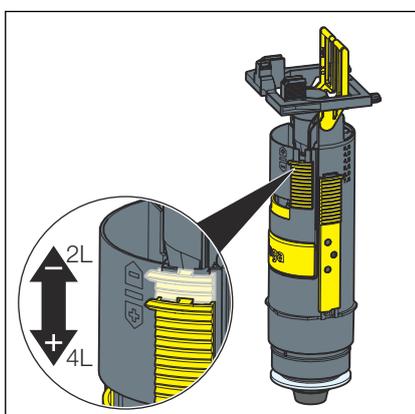


➤ Set the small flush volume at the drain valve.


Setting the flush flow

Requirements:

- The drain valve has been dismantled.
- The flushing throttle has been removed.

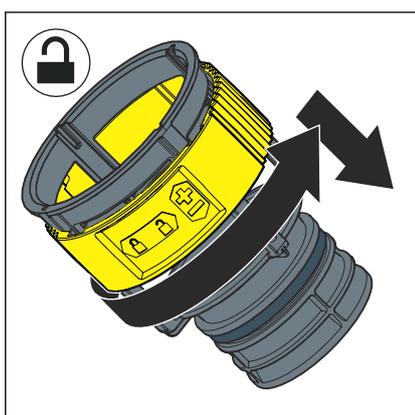


- Unlock the flushing throttle.
- Set the flush flow at the throttle.

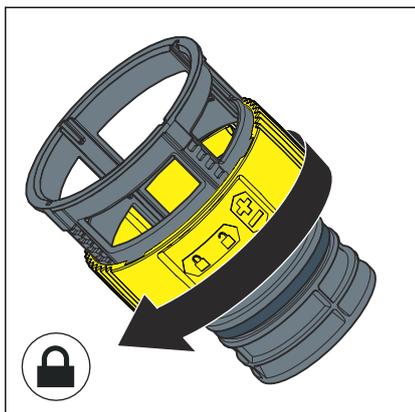



► Lock the flushing throttle.

3.2.6 Mounting WC ceramic

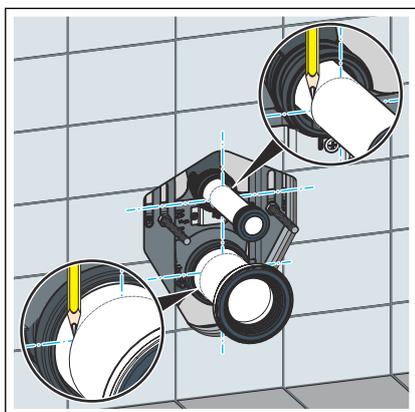


► Mark the insertion depth of the flush pipe and drainpipe.

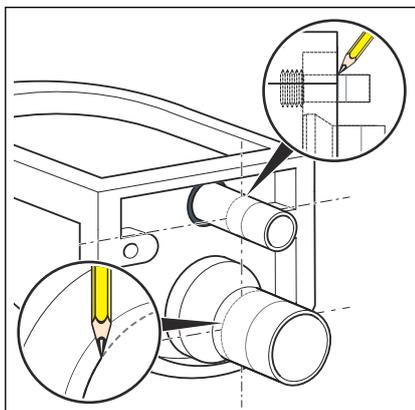


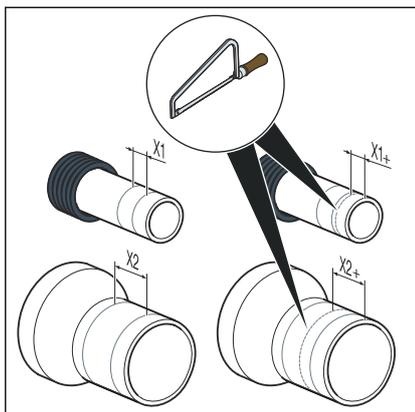

► Cut the flush pipe and drainpipe to length.

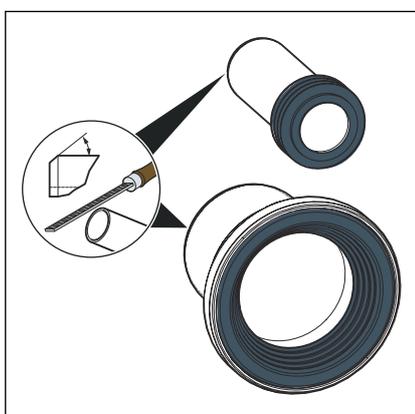

► Deburr the flush pipe and drainpipe.

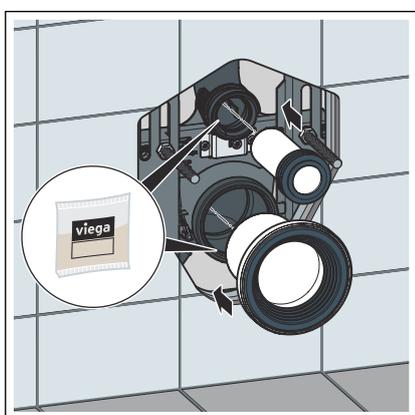


► Coat the flush pipe and drainpipe with silicon grease and insert them.



► Mount the WC ceramic.



- Align and secure the WC ceramic.

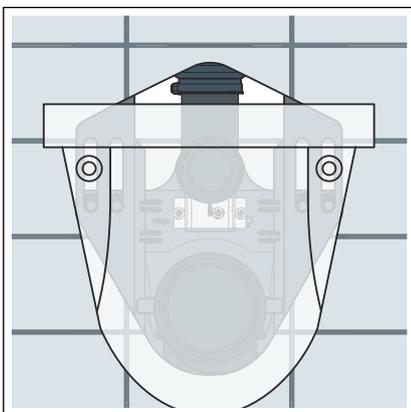

- Check if the wall opening is fully covered by the WC ceramic. If not, use cover plate model 8040.21.

3.3 Use

Adjusting WC height



- Loosen (do not remove) the fixing screws with fork spanner.



► Adjust the WC ceramic's height.



► Align the WC ceramic and re-tighten fixing screws.

3.4 Cleaning and maintenance

Cleaning and maintenance of the concealed cistern

The concealed cistern is constantly under mechanical, chemical, and physical stress. For this reason, the components must be cleaned as required, and the drain and filling valve seals renewed.

In areas or regions with hard water due to high concentration of calcium or magnesium salts, there is the risk of limescale deposits developing on the inlet and drain valves. The valves may have to be replaced, depending on the extent of the deposits.

3.5 Disposal

Separate the product and packaging materials (e. g. paper, metal, plastic or non-ferrous metals) and dispose of in accordance with valid national legal requirements.



Viega GmbH & Co. KG
service-technik@viega.de
viega.com

INT • 2023-02 • VPN210795

